



TELECOM VAULT

NOTES:

- CONCRETE: 5000 psi @ 28 days
- REF: Cover Slab - #7 rebar @ 6" o.c. in short direction
#6 rebar @ 11" o.c. in long direction
(2" conc cover from bottom up)
- Riser #1 - #5 rebar @ 6" o.c. in horizontal dir.
#5 rebar @ 12" o.c. in vertical direction
(2" conc cover from inner core)
- Base Riser - #4 rebar @ 8" o.c. both directions
(2" conc cover from inner core)
- Base - #6 rebar @ 6" o.c. in short direction
#5 rebar @ 6" o.c. in long direction
(2" conc cover from top down)
- Additional rebar - #5 rebar bent "L"s from base to wall @ 8" o.c. (18" x 18" tails)
- Rebar diamond around all openings
- OPENINGS: 21" x 21" knockouts (location to be determined by contractor)
- LIFTING: PA lifting cables as shown on detail
- CASTING: supplied by contractor
- JOINT: Con-Seal CS-102 butyl seal

Weight:

- Base & Riser: 12,100#
- Riser #1: 13,900#
- Cover: 8,800#

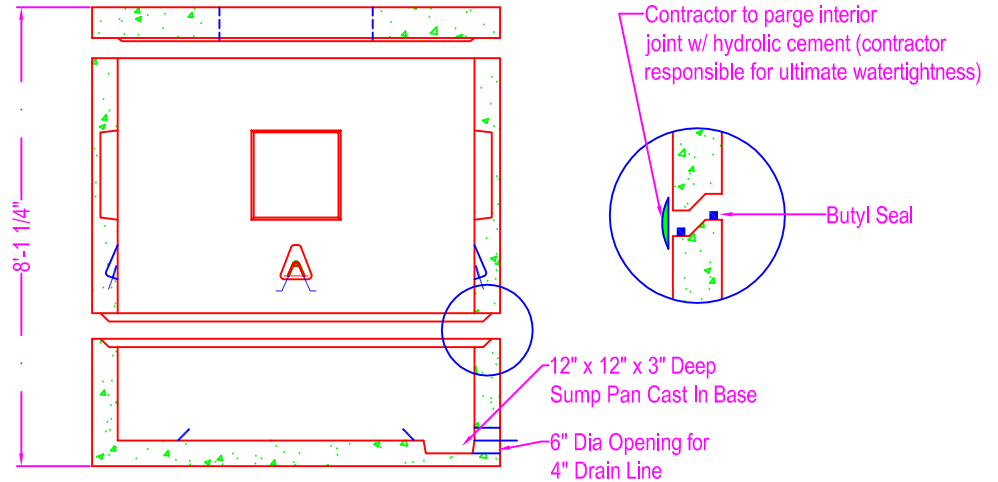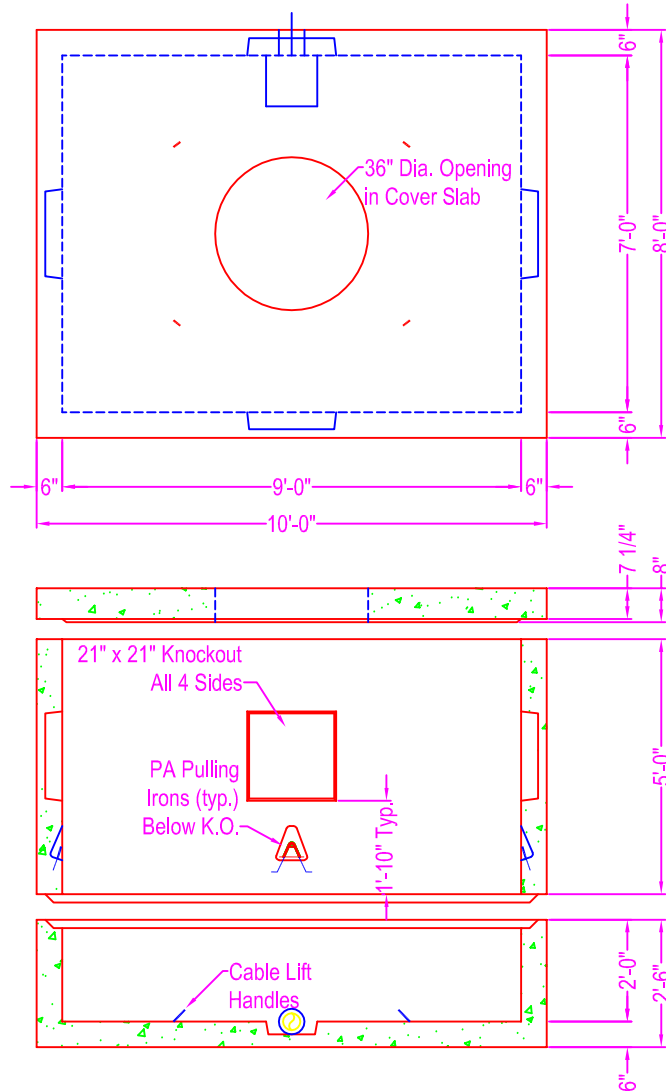

	750 Howard Street Elmira, NY 14904 Fax: (607) 737-0291 Phone: (607) 733-0568 1-800-472-4335	Title: Telecom Vault	Drawn By: JPS
		Scale: Not To Scale	Drawing No.: 02180800
			Date: 2-18-08